

www.hitachidigitalmedia.com

**HITACHI**  
Inspire the Next

CP-X1250

CP-X1200



CP-X1250 XGA  
4500 ANSI Lumens



CP-X1200 XGA  
3500 ANSI Lumens

# CP-X1250/CP-X1200

## CP-X1250/CP-X1200 features

- 4500 ANSI Lumens (CP-X1250)
- 3500 ANSI Lumens (CP-X1200)
- Full Connectivity
- Vertical Lens Shift System (Lockable)
- Horizontal and Vertical Keystone Correction
- My Screen Option with Lock System
- 1.5x Powered Zoom Lens
- Progressive Scan for smooth, flicker-free pictures
- PIN Security Protection

With an astounding output of 4500 ANSI Lumens (3500 ANSI Lumens for CP-X1200), a 0.99" liquid crystal panel plus a UHB 310W lamp, these projectors give astonishing brightness and will project clearly visible images even in brightly lit rooms.

They are ideal for medium to large venues and the flexibility of the zoom lens and Vertical Lens Shift System gives you the freedom to choose exactly where you want to install the projector. XGA resolution means that presentations containing fine detail such as spreadsheets and diagrams are clear and sharp, whilst the 800:1 contrast ratio on the CP-X1250 (750:1 on the CP-X1200) delivers superb graphics.

Advanced features enhance presentation quality and make delivery even easier. Other features include Horizontal and Vertical Keystone correction, which corrects keystone distortion, whilst the My Screen feature allows an image to be displayed at switch on before the presentation begins. With full connectivity the CP-X1250 and CP-X1200 models feature the usual DVI and component terminals, with the addition of BNC terminals.

## Advanced User Features

The CP-X1250 and CP-X1200 models boast a variety of features, which offer outstanding brightness, picture quality, and convenience for all types of presentations.

## Vertical Lens Shift System

If you are unable to place the projector directly in front of the screen then use this feature to give you installation freedom. With a 10:0 to 1:1 lens shift capability, the CP-X1250 and CP-X1200 allows you to move the picture vertically a distance equal to one half of the picture, whilst still throwing a perfectly aligned image. This feature can also be controlled by remote control and easily adjusted, even when the projector is ceiling mounted.

## High Brightness

A high, 800:1 (CP-X1250) and 750:1 (CP-X1200) contrast ratio enables these projectors to deliver images with unbelievable impact, retrieving and displaying the darkest shades of black and the brightest whites, for a stunning viewing experience.

## Convenient Ceiling Installation

Both of these projectors have a lamp replacement panel on the top, which makes it easier to change the lamp when the unit is suspended from the ceiling. Cable connection is stable due to the BNC terminal and the projector can be controlled from far away using the wireless remote control. Cable connection is stable due to the BNC terminal and the projector can be controlled from far away using the wireless remote control or the network connection.

## My Screen Function with Lock System


The new My Screen feature allows the user to store an image such as a company logo or a product picture in the projector's non-volatile memory. This image is then displayed immediately when the projector is switched on, even before any input sources are connected, providing a more professional start to a presentation. The Lock System ensures that anything stored in the My Screen function is not accidentally over written.

## 1.5x Zoom Lens

The CP-X1250 and CP-X1200 projectors both feature a 1.5x powered zoom lens as standard, which can be used at distances from 3.0 to 4.6m to project a 100" screen. This allows greater flexibility in positioning the projector where space is limited. The electronically powered zoom, focus and lens shift can all be adjusted via the remote control.

## Optional lenses for all uses

Four different optional lenses are available, suitable for a wide range of applications. This allows you to position the projectors in the best position suited to the environment, from small to large venues. And as the lenses are bayonet types, they are easy to replace.



Fixed Short  
(FL-501)



Short Throw  
(SL-502)




Long Throw  
(LL-503)



Long Throw  
(LL-504)

## Projection Distance Chart

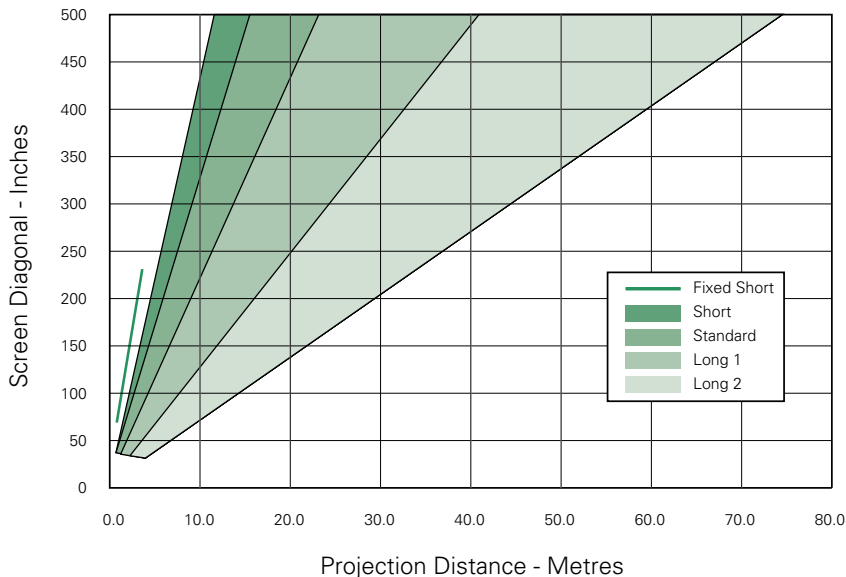

## Horizontal and Vertical Keystone Correction

Setting up is both easier and more flexible thanks to integrated horizontal and vertical keystone correction, accessed directly via a single button on the unit's control panel. This feature means that the projector can be set off to the right or left of the screen and correction can be applied to remove any image distortion.

## Motion Adaptive Progressive IC

Hitachi's unique Motion Adaptive Progressive integrated chip delivers 480-line, progressively scanned video images, which are smoother and more detailed than traditional interlaced video images. This ensures no visible scan lines and perfect pictures every time.

## Multiple Inputs

Both the CP-X1250 and CP-X1200 offer virtually every input connection required to accommodate today's media sources. Video inputs cater for composite, S-Video and component video formats, all with stereo audio. On the computer side there are two analogue RGB inputs and in addition to the usual DVI and Component terminals, these models have a new BNC terminal and also a D-sub 9-pin adapter.

## Port Exhaust Fan

Air is expelled from the front of the projector, so that viewers, who will typically be seated either behind or to the side of the projector, won't be affected by a current of hot air.



## For business presentations

*The CP-X1250 can be used for a wide range of effective presentations in any space from small meeting rooms to large conference rooms.*



## Conference halls

*With exceptionally high brightness, the CP-X1250 can project high quality images, even in a large hall.*

## For academic uses



*Projectors in various classrooms and lecture theatres will provide clear, sharp and detailed on-screen images.*

# CP-X1250 & CP-X1200

## Technical Specifications

**HITACHI**  
Inspire the Next

OPTICAL	CP-X1250	CP-X1200
Lamp	310W UHB (50% Performance 2000h)	275W UHB (50% Performance 2000h)
Lamp Life	2000 Hours	2000 Hours
Brightness (Normal)	4500 ANSI Lumens	3500 ANSI Lumens
(Whisper)	3600 ANSI Lumens	2800 ANSI Lumens
Contrast Ratio	800:1	750:1
Replacement Lamp	DT00601	DT00591

OPTICAL (BOTH MODELS)	
LCD Panel	0.99", P-Si TFT Panel x 3 with Micro Lens
Resolution	1024 x 768
Lens	F=1.7-2.4, (f=31-46mm), Power Zoom x 1.5
Lens Shift	Powered Vertical 10:1-1:1
Focus Distance	1.2-15.53m (WIDE) 1.8-23.2m (TELE)
Display Size	40"-500"
Colour	8 Bits/colour, 16.7M colours
Distance to Width Ratio (1)	1.50 (WIDE), 2.2 (TELE)

COMPATIBILITY	
Composite Video	NTSC/PAL(-BGDHI), SECAM, PAL M, PAL N, NTSC4.43, PAL60
Component Video	525i(480i), 525p(480p), 625i(575i), (1080i@50/60), 750p, (720p@50/60)
Computer	IBM Compatible VGA, SVGA, XGA, SXGA/UXGA (Compressed)
Plug & Play	MAC13", MAC16" (Pixel works Chip)
Frequency Range	DDC1/2B (RGB1), DDC2B (MI-D) fit: 15-91kHz/fv: 50-120Hz

FEATURES	
Keystone Correction	Keystone Automatic on Vertical only
Start Up Screen	My Screen with Lock System
Image Control	Electrical H & V Keystone
User Controls	Picture in Picture, 15 Language Menus, Freeze Function, Magnify (4x), Digital Gamma Correction, PIN Lock System, Unique ID Via Remote Control, Auto Adjust for Computer and Video Signals
Speakers	2 x 1W

CONNECTORS	
Computer Input	1 x 15-pin D-sub 5 x BNC (Shared with Component) 1 x MI-D (HDCP - decoding for digital video signal) 2 x Audio, Stereo Mini Jack
Computer Output	1 x 15-pin D-sub (analogue only 15-pin D-sub or BNC)
Video Input	1 x Composite Video, RCA Jack 1 x SVHS Video, Mini DIN 4-pin 3 x Component Video RCA Jack 1 x Component share RGB1/BNC 2 x Audio (L/R) RCA Jack
Audio Output	1 x Stereo Mini Jack
Control	1 x 9-pin D-sub for RS232 (Serial)
Network Interface	1 x RJ-45
Wired Remote Control	1 x Stereo Mini Jack for "Wired" Remote Control
USB	Included MI-D, for Remote Control Mouse Only

POWER	
Power Supply	100-120V/220-240V, 50/60Hz, Auto switching
Power Consumption	430W

PHYSICAL	
Dimensions (W x H x D)	420 x 150 x 310mm (excluding feet and extrusions)
Weight	7.7Kg
Noise Level	39dB Normal Mode / 35dB Whisper Mode
Approvals	UL60950/C-UL, FCC Part 15, Class B, CE, TUV EN60950




**MISCELLANEOUS**  
Lamp and Temperature Indicator Lights, Input Indicator Light, Ceiling Mount Image, Rear Projection image, Easy/Advanced OSD Menu, Power Zoom, Power Focus, Power Lens Shift, Lens Shift Lock, Remote Control can be wired to Projector, HDCP decoding for Digital Video Signal, My Memory (4 settings), Optional Lens Auto Detection, Component/SCART RGB Selection on BNC Port

**ACCESSORIES SUPPLIED**  
Remote Control with Laser Pointer, Batteries, RGB Cable, Video Cable for audio/video, M1-D cable (DVI and USB to M1), Power Cord, Soft Carrying Case, User Manual (14 languages on CD), Quick Guide (14 languages on CD), Safety Instructions (15 languages)

Image size		Projector Distance	
Diagonal	Width (m)	Min	Max
40" (1.0m)	0.61	1.2m (46")	1.8m (71")
60" (1.5m)	1.22	1.8m (71")	2.7m (107")
120" (3.0m)	2.44	3.7m (144")	5.5m (217")
200" (5.1m)	4.06	6.2m (243")	9.2m (364")
300" (7.6m)	6.10	9.3m (366")	13.9m (547")
500" (12.7m)	10.16	15.5m (612")	23.2m (913")

Screen Size (inch)	a		b		c	
	Min	Max	1:1	10:1	1:1	10:1
60 (1.5m)	0.9m (34")	1.2m (48")	30cm (12")	61cm (24")	-30cm (-12")	0 (0")
100 (2.54m)	1.6m (63")	2.1m (83")	51cm (20")	102cm (40")	-51cm (-20")	0 (0")
150 (3.8m)	2.4m (95")	3.2m (126")	76cm (30")	153cm (60")	-76cm (-30")	0 (0")
200 (5.1m)	3.2m (128")	4.3m (169")	102cm (40")	204cm (80")	-102cm (-40")	0 (0")
230 (5.8m)	3.7m (147")	4.9m (193")	114cm (45")	228cm (90")	-114cm (-45")	0 (0")

Screen Size (inch)	a		b		c	
	Min	Max	1:1	10:1	1:1	10:1
40	0.9m (34")	1.2m (48")	30cm (12")	61cm (24")	-30cm (-12")	0 (0")
120	2.7m (107")	3.7m (146")	91cm (36")	183cm (72")	-91cm (-36")	0 (0")
200	4.6m (180")	6.2m (245")	152cm (60")	305cm (120")	-152cm (-60")	0 (0")
300	6.9m (271")	9.3m (366")	229cm (90")	457cm (180")	-229cm (-90")	0 (0")
500	11.5m (453")	15.6m (614")	381cm (150")	762cm (300")	-381cm (-150")	0 (0")

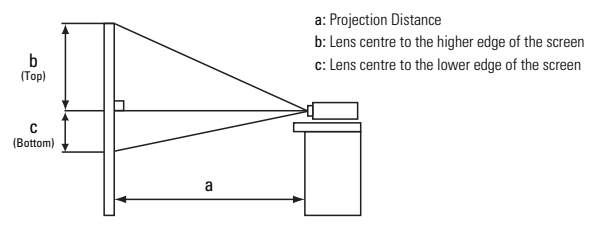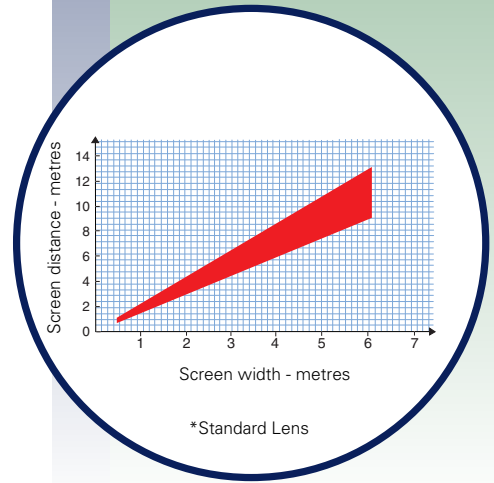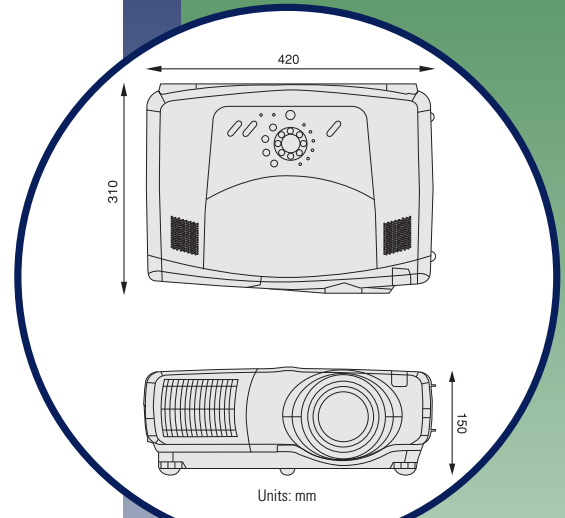

Screen Size (inch)	a			b		c	
	Min	Stack	Max	1:1	10:1	1:1	10:1
40	1.8m (69")	2.4m (93")	3.3m (130")	30cm (12")	61cm (24")	-30cm (-12")	0 (0")
120	5.5m (216")	7.3m (287")	10.1m (398")	91cm (36")	183cm (72")	-91cm (-36")	0 (0")
200	9.2m (363")	12.2m (481")	16.9m (665")	152cm (60")	305cm (120")	-152cm (-60")	0 (0")
300	13.9m (546")	18.4m (724")	25.4m (1000")	229cm (90")	457cm (180")	-229cm (-90")	0 (0")
500	23.2m (913")	30.7m (1209")	42.4m (1669")	381cm (150")	762cm (300")	-381cm (-150")	0 (0")

Screen Size (inch)	a			b		c	
	Min	Stack	Max	1:1	10:1	1:1	10:1
40	3.1m (124")	4.4m (175")	5.8m (230")	30cm (12")	61cm (24")	-30cm (-12")	0 (0")
120	9.7m (382")	13.6m (535")	17.8m (701")	91cm (36")	183cm (72")	-91cm (-36")	0 (0")
200	16.2m (640")	22.8m (896")	29.8m (1172")	152cm (60")	305cm (120")	-152cm (-60")	0 (0")
300	24.4m (962")	34.2m (1346")	44.7m (1760")	229cm (90")	457cm (180")	-229cm (-90")	0 (0")
500	40.8m (1607")	57.1m (2248")	74.6m (2937")	381cm (150")	762cm (300")	-381cm (-150")	0 (0")

HITACHI DIGITAL MEDIA, Hitachi Europe Ltd, Whitebrook Park, Lower Cookham Road, Maidenhead, Berkshire SL6 8YA

Tel: 01628 585 000 Fax: 01628 585 500 www.hitachidigitalmedia.com

All brand or product names are trademarks or registered trademarks of their respective owners. Design and specification are subject to change without notice.